

General Purpose Silicon Rectifiers

Reverse Voltage: 100 to 1000 Volts

Forward Current: 20 Ampere

RoHS Device

Halogen Free


Features

- Glass passivated chip junctions
- Low reverse current operation
- High Junction Temperature
- High Forward Surge Capability
- Lead free in compliance with EU RoHS 2011/65/EU directive

Mechanical data


- Circuit figure: Single positive
- Leads: Solderable per mil-std-202, Method 208
- Polarity: as marked
- Mounting torque: 5 in-lbs maximum
- Terminals: Puretin plated
- Weight: TO-220AC 1.80 grams
ITO-220AC 1.65 grams

Package outline

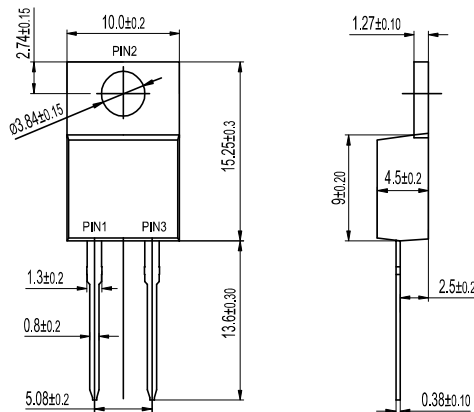


TO-220AC
DR20XX

Dimensions in millimeters

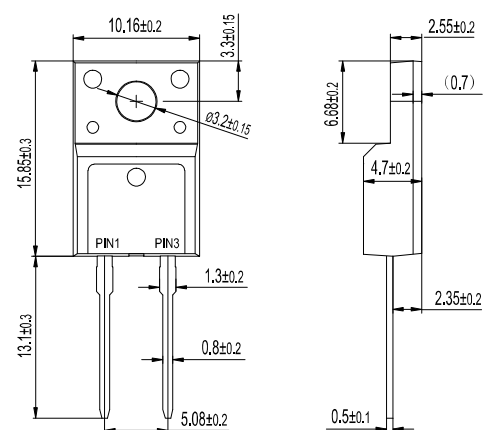

ITO-220AC
DR20XXF



Company reserves the right to improve product design , functions and reliability without notice.

Rev:1.0

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz resistive or inductive load, for capacitive load, derate by 20%

Parameter	Symbol	DR 2001 2001F	DR 2002 2002F	DR 2004 2004F	DR 2006 2006F	DR 2008 2008F	DR 2010 2010F	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	100	200	400	600	800	1000	V
Maximum average forward current	I_{AV}	20						A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	250						A
Typical thermal resistance per diode (Note 1)	$R_{\theta JC}$	2.5 4.0						°C/W
Operating junction temperature range	T_J	-55 ~ +150						°C
Storage temperature range	T_{stg}	-55 ~ +150						°C
Characteristics	Symbol	DR 2001 2001F	DR 2002 2002F	DR 2004 2004F	DR 2006 2006F	DR 2008 2008F	DR 2010 2010F	Unit
Maximum instantaneous forward voltage at specified current	V_F	1.1						V
Maximum DC reverse current at rated DC blocking voltage	I_R	5.0 250						μA

Notes: 1. Thermal resistance from junction to case.

Rating and Characteristic Curves

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

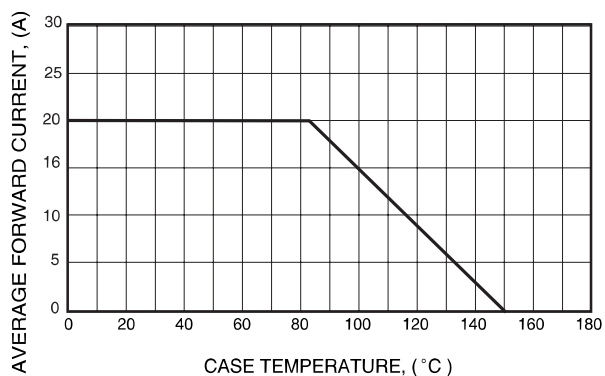


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

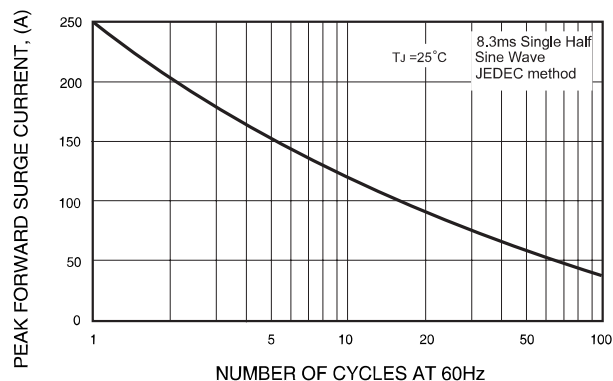


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS



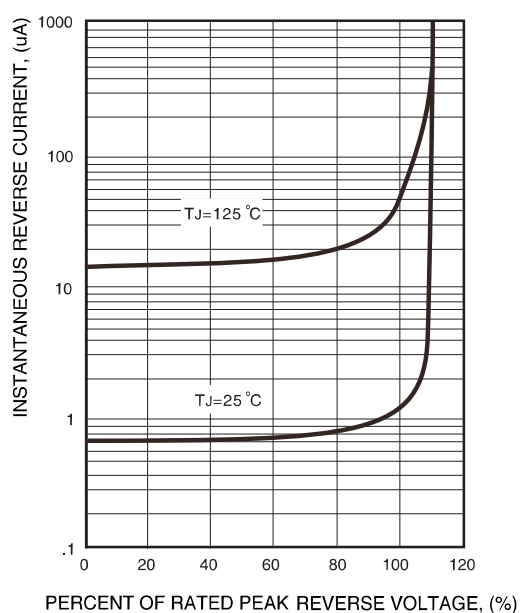


FIG. 2 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

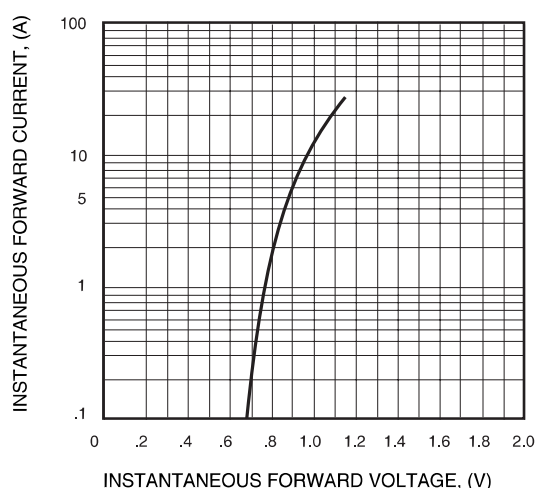

Standard Packaging

Case Type	TUBE PACK	
	TUBE (pcs)	BOX (pcs)
TO-220AC	50	1,000

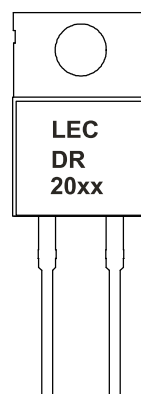

Standard Packaging

Case Type	TUBE PACK	
	TUBE (pcs)	BOX (pcs)
ITO-220AC	50	1,000

