


N-Channel MOSFET

RoHS Device
Halogen Free



Features



- 100V,3A
- $R_{DS(ON)} = 180m\Omega$ (Typ.) @ $V_{GS} = 10V$
 $R_{DS(ON)} = 210m\Omega$ (Typ.) @ $V_{GS} = 4.5V$
- High Density Cell Design for Ultra Low $R_{DS(ON)}$
- Fully Characterized Avalanche Voltage and Current
- Excellent Package for Good Heat Dissipation

Application

- Uninterruptible Power Supply(UPS)
- Hard Switched and High Frequency Circuits
- Power Switching application

Circuit Diagram

- G : Gate
- S : Source
- D : Drain

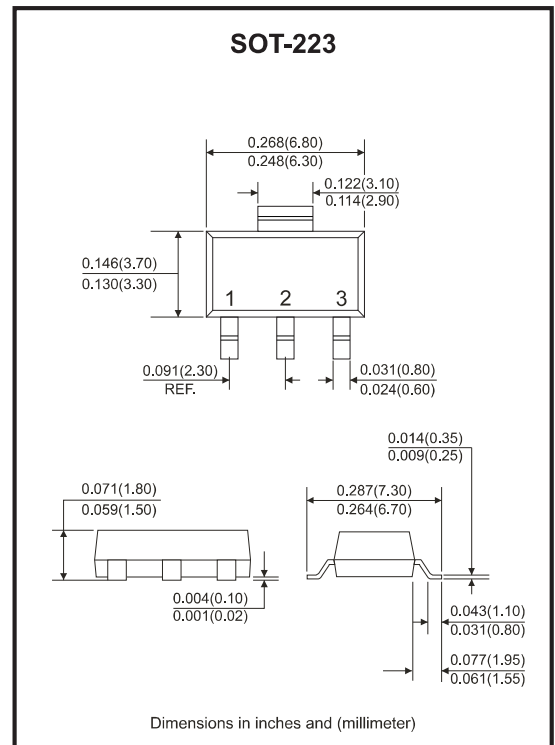

Absolute Maximum Ratings ($T_C = 25^\circ C$ unless otherwise specified)

Symbol	Parameter		Max.			Units
			SOT-223			
V _{DSS}	Drain-Source Voltage		100			V
V _{GSS}	Gate-Source Voltage		±20			V
I _D	Continuous Drain Current	T _C = 25°C	3			A
		T _C = 100°C	2			A
I _{DM}	Pulsed Drain Current ^{note1}		12			A
P _D	Power Dissipation	T _A = 25°C	2.5	3.9	5	W
R _{θJA}	Thermal Resistance, Junction to Ambient		50	32	25	°C/W
T _J , T _{STG}	Operating and Storage Temperature Range		-55 to +150			°C

Electrical Characteristics (T_C=25°C unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V,I _D =250μA	100	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =100V, V _{GS} = 0V,	-	-	1.0	μA
I _{GSS}	Gate to Body Leakage Current	V _{DS} =0V,V _{GS} = ±20V	-	-	±100	nA
On Characteristics						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D =250μA	1.0	2.1	3.0	V
R _{DS(on)}	Static Drain-Source on-Resistance note2	V _{GS} =10V, I _D =2A	-	180	310	mΩ
		V _{GS} =4.5V, I _D =1A	-	210	350	
g _{FS}	Forward Transconductance	V _{DS} =10V, I _D =3A	-	1.1	-	S
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =50V, V _{GS} = 0V, f = 1.0MHz	-	190	-	pF
C _{oss}	Output Capacitance		-	22	-	pF
C _{rss}	Reverse Transfer Capacitance		-	13	-	pF
Q _g	Total Gate Charge	V _{DS} =50V, I _D =1A, V _{GS} =10V	-	5.2	-	nC
Q _{gs}	Gate-Source Charge		-	0.75	-	nC
Q _{gd}	Gate-Drain(“Miller”) Charge		-	1.4	-	nC
Switching Characteristics						
t _{d(on)}	Turn-on Delay Time	V _{DD} =50V,R _L =39Ω, R _G =1Ω, V _{GS} =10V	-	6	-	ns
t _r	Turn-on Rise Time		-	10	-	ns
t _{d(off)}	Turn-off Delay Time		-	10	-	ns
t _f	Turn-off Fall Time		-	6	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I _S	Maximum Continuous Drain to Source Diode Forward Current		-	-	3	A
I _{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	12	A
V _{SD}	Drain to Source Diode Forward Voltage	V _{GS} = 0V, I _S =1A	-	-	1.2	V

Notes: 1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature

2. Pulse Test: Pulse Width≤300μs, Duty Cycle≤2%

Typical Performance Characteristics

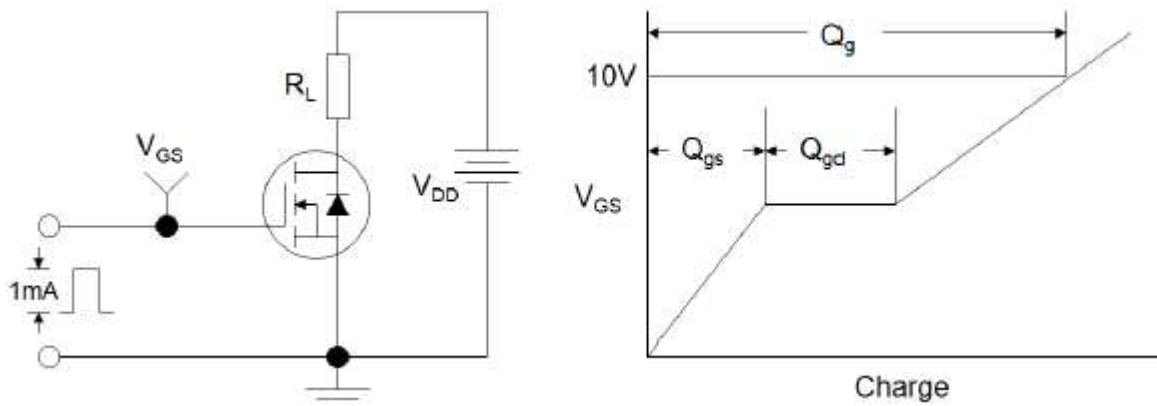


Figure1:Gate Charge Test Circuit & Waveform

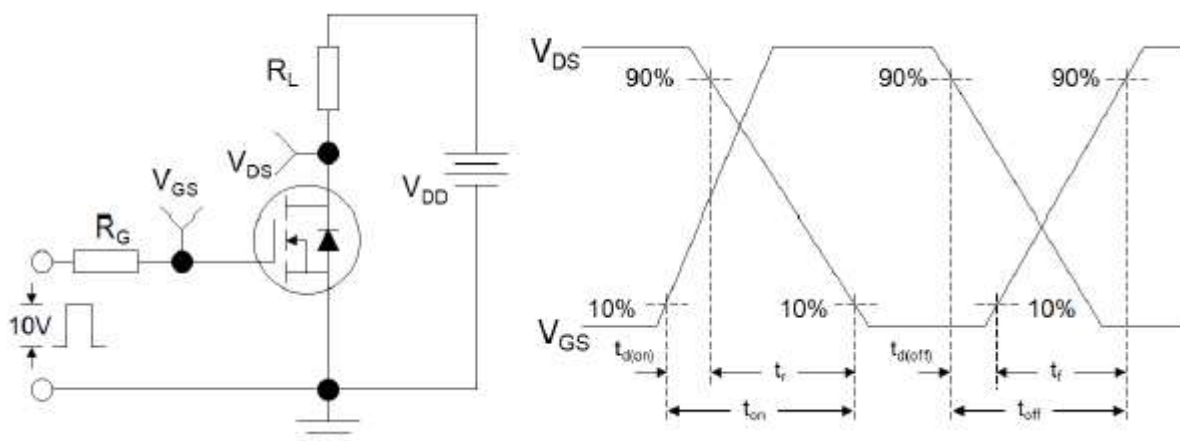


Figure 2: Resistive Switching Test Circuit & Waveforms

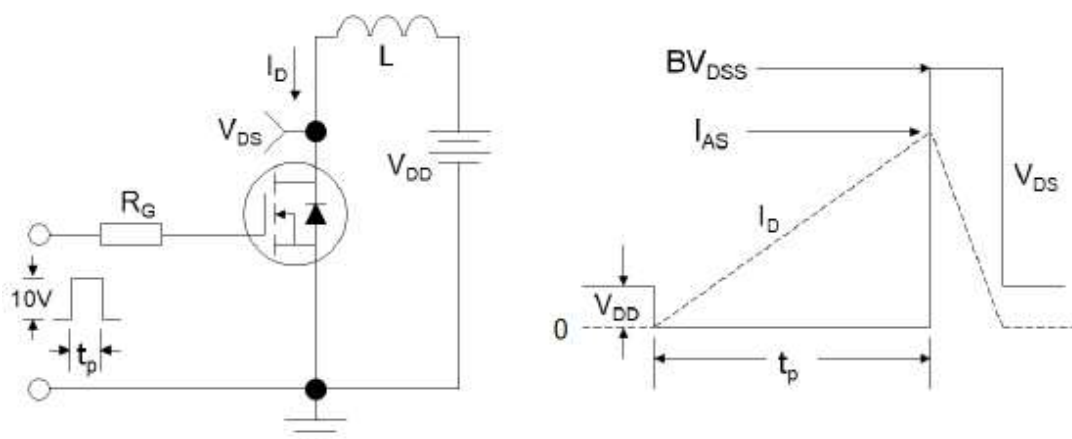


Figure 3:Unclamped Inductive Switching Test Circuit & Waveforms



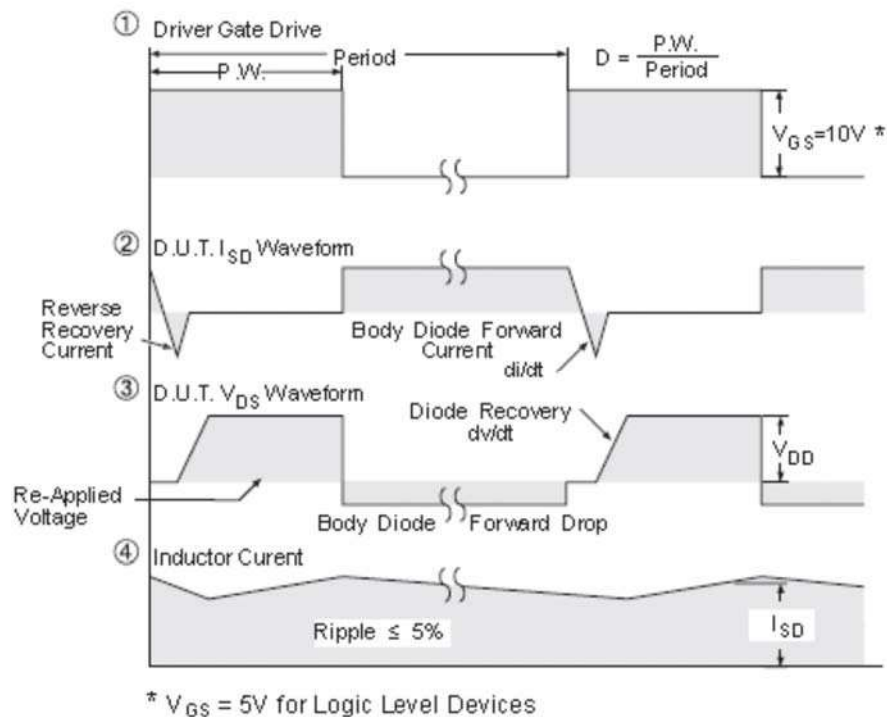


Figure 4: Peak Diode Recovery dv/dt Test Circuit & Waveforms (For N-channel)

Marking Code

Part Number	Marking Code
LMY3N10A	0102

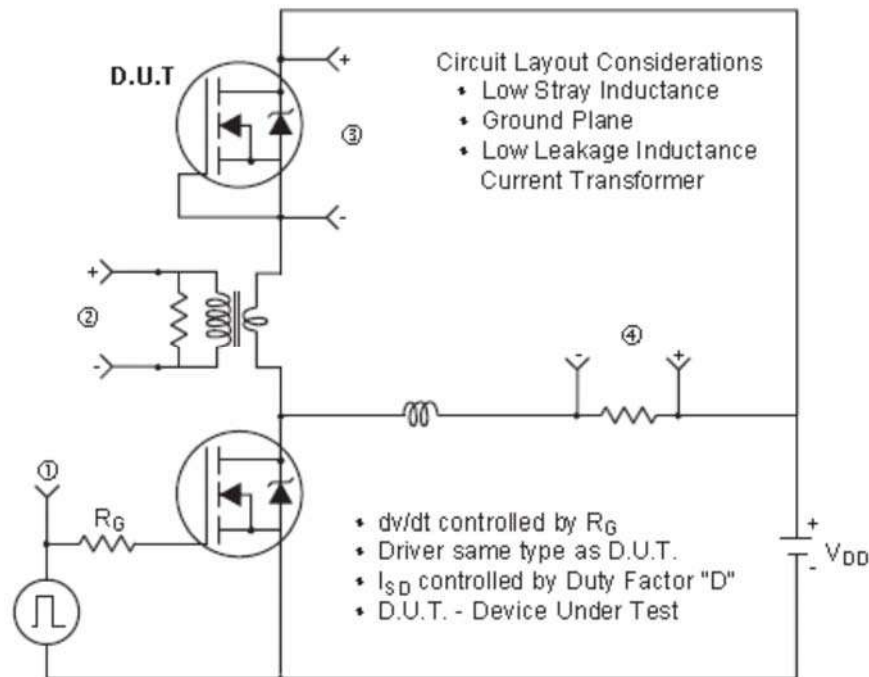


xxxx = Product type marking code

Suggested PAD Layout

SIZE	SOT-223	
	(mm)	(inch)
A	0.81	0.032
B	1.12	0.044
C	2.30	0.091
D	5.98	0.235
E	3.10	0.122





Note: 1. The pad layout is for reference purposes only.

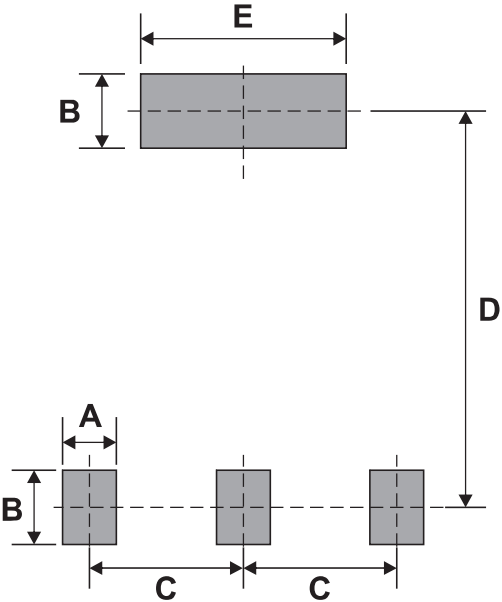

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-223	2,500	13

Reel Taping Specification

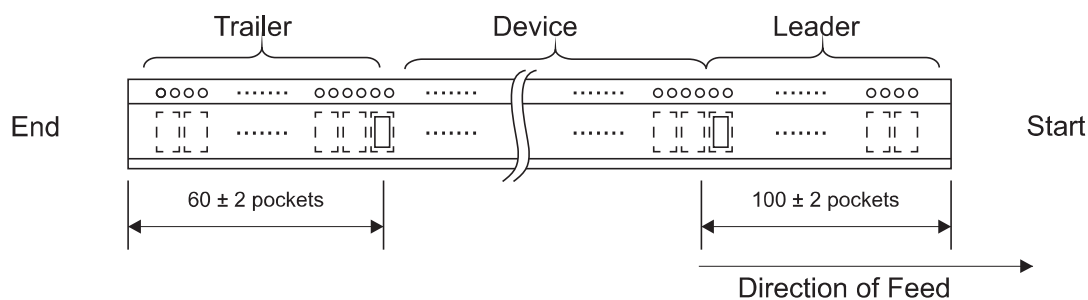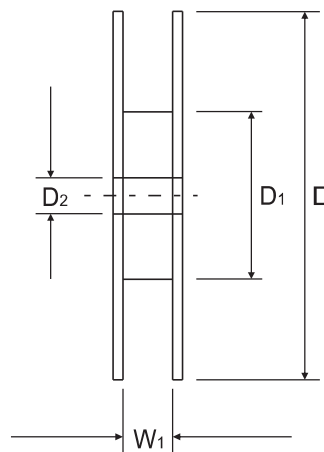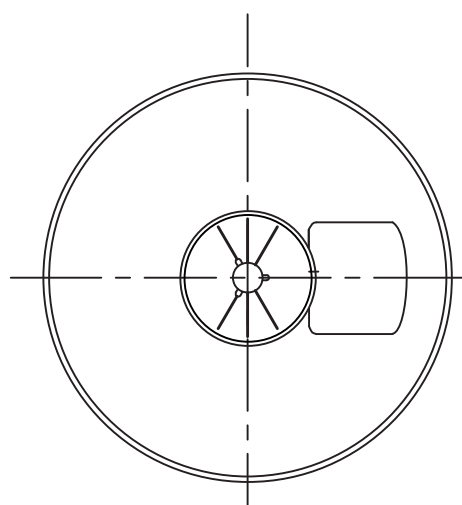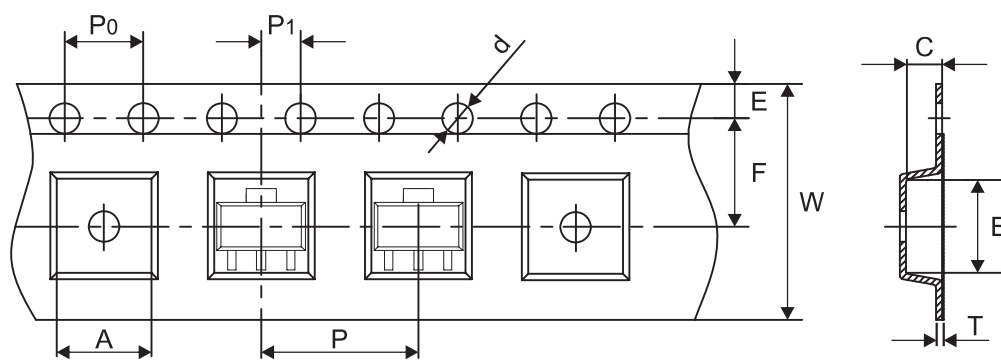

SOT-223	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	7.05 ± 0.10	7.40 ± 0.10	1.90 ± 0.10	1.55 ± 0.05	330.00 ± 1.00	100.00 ± 0.50	13.00 ± 0.50
	(inch)	0.278 ± 0.004	0.291 ± 0.004	0.075 ± 0.004	0.061 ± 0.002	12.992 ± 0.039	3.937 ± 0.020	0.512 ± 0.020

SOT-223	SYMBOL	E	F	P	P0	P1	T	W	W1
	(mm)	1.75 ± 0.10	5.50 ± 0.05	8.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	0.25 ± 0.05	12.00 + 0.15 - 0.10	12.40 + 2.00 - 0.00
	(inch)	0.069 ± 0.004	0.217 ± 0.002	0.315 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	0.010 ± 0.002	0.472 + 0.006 - 0.004	0.488 + 0.079 - 0.000