

SM8S16(C)A THRU SM8S85(C)A




Transient Voltage Suppressor

Breakdown Voltage:16 to 85 Volts

Peak Pulse Power:6600 Watts

RoHS Device

Halogen Free



Features


- Surface mount package.
- Excellent clamping capability.
- Glass passivated junction.
- Low Leakage current.
- Meets ISO7637-2 test(varied by test condition)
- Plastic material has UL flammability classification 94V-O
- AEC-Q101 qualified.

Mechanical Data

CASE: DO-218AB Molded Plastic over glass passivated junction.

Polarity: Heatsink is anode for uni-direction.


Circuit Diagram



Uni-directional



Bi-directional

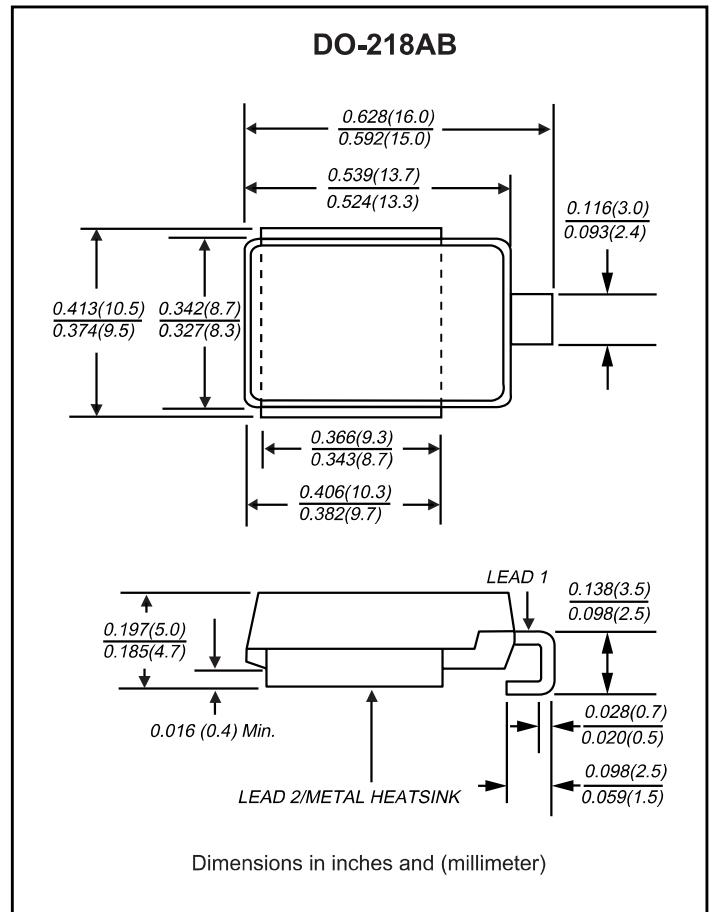

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive loaded.

For capacitive load, derated current by 20%.

Parameter	Symbol	Value	Units
Peak Pulse Power dissipation on 10/1000us Waveform (Note 1, FIG.1)	P _{PPM}	6600	W
Power Dissipation on Infinite Heatsink at T _c =25°C (FIG.2)	P _D	8	W
For uni-direction, Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load, (JEDEC Method)(Note 2. 3)	I _{FSM}	700	Amps
Operating Junction Temperature Range	T _J	-55 to 150	°C
Storage Temperature Range	T _{STG}	-55 to 150	°C

Notes:

1. Non-repetitive current pulse, per Fig.1 and derated above T_A=25°C per Fig.2.
2. Mounted on 5.0mm² (0.03mm thick) Copper Pads to each terminal.
3. 8.3 ms single half sine-wave, or equivalent square wave, Duty cycle=4 pluses per minute maximum.

Company reserves the right to improve product design , functions and reliability without notice.




SM8S16(C)A THRU SM8S85(C)A



Electrical Characteristics (at TA=25°C, unless otherwise specified)


Type Number		Reverse Stand-Off Voltage	Breakdown Voltage Min. @I _T	Breakdown Voltage Max. @ I _T	Test Current	Maximum Clamping Voltage @I _{PP}	Max. Peak Pulse Current	Maximum Reverse Leakage @V _{RWM}
Uni	Bi	V _{RWM} (V)	V _{BR} MIN(V)	V _{BR} MAX(V)	I _T (mA)	V _C (V)	I _{PP} (A)	I _R (uA)
SM8S16A	SM8S16CA	16	17.8	19.7	5.0	26.0	254	10.0
SM8S17A	SM8S17CA	17	18.9	20.9	5.0	27.6	239	10.0
SM8S18A	SM8S18CA	18	20.0	22.1	5.0	29.2	226	10.0
SM8S20A	SM8S20CA	20	22.2	24.5	5.0	32.4	204	10.0
SM8S22A	SM8S22CA	22	24.4	26.9	5.0	35.5	186	10.0
SM8S24A	SM8S24CA	24	26.7	29.5	5.0	38.9	170	10.0
SM8S26A	SM8S26CA	26	28.9	31.9	5.0	42.1	157	10.0
SM8S28A	SM8S28CA	28	31.1	34.4	5.0	45.4	145	10.0
SM8S30A	SM8S30CA	30	33.3	36.8	5.0	48.4	136	10.0
SM8S33A	SM8S33CA	33	36.7	40.6	5.0	53.3	124	10.0
SM8S36A	SM8S36CA	36	40.0	44.2	5.0	58.1	114	10.0
SM8S40A	SM8S40CA	40	44.4	49.1	5.0	64.5	102	10.0
SM8S43A	SM8S43CA	43	47.8	52.8	5.0	69.4	95.1	10.0
SM8S45A	SM8S45CA	45	50.0	55.3	5.0	72.7	90.8	10.0
SM8S48A	SM8S48CA	48	53.3	58.9	5.0	77.4	85.3	10.0
SM8S51A	SM8S51CA	51	56.7	62.7	5.0	82.4	80.1	10.0
SM8S54A	SM8S54CA	54	60.0	66.3	5.0	87.1	75.8	10.0
SM8S58A	SM8S58CA	58	64.4	71.2	5.0	93.6	70.5	10.0
SM8S60A	SM8S60CA	60	66.7	73.7	5.0	96.8	68.1	10.0
SM8S64A	SM8S64CA	64	71.1	78.6	5.0	103	64.1	10.0
SM8S70A	SM8S70CA	70	77.8	86.0	5.0	113	58.4	10.0
SM8S75A	SM8S75CA	75	83.0	92.1	5.0	121	54.5	10.0
SM8S78A	SM8S78CA	78	86.0	95.8	5.0	126	52.4	10.0
SM8S85A	SM8S85CA	85	94.0	104	5.0	137	48.2	10.0

Rating and Characteristic Curves (at $T_A=25^\circ\text{C}$, unless otherwise specified)

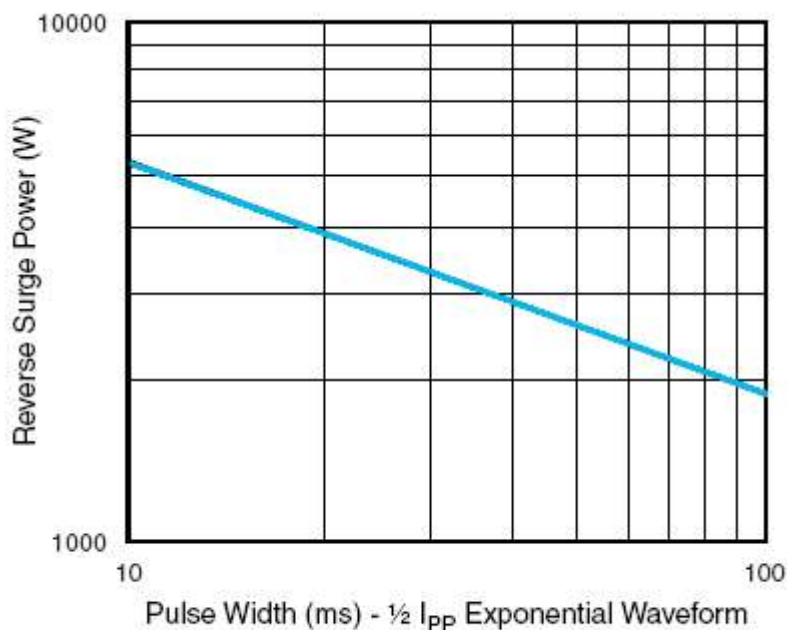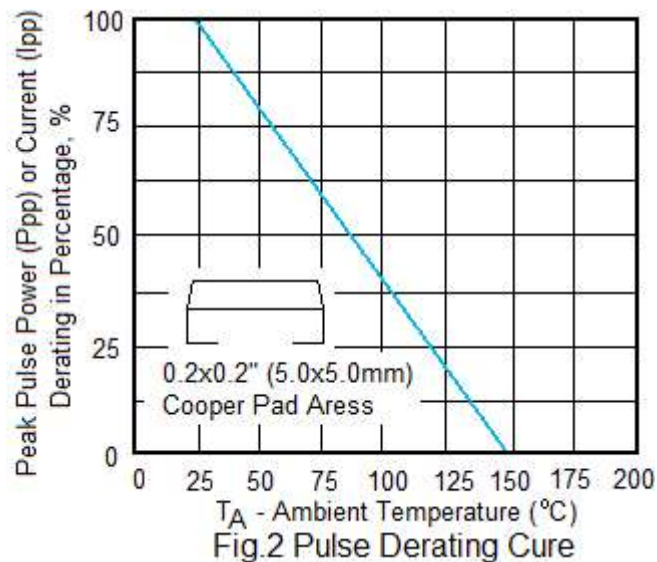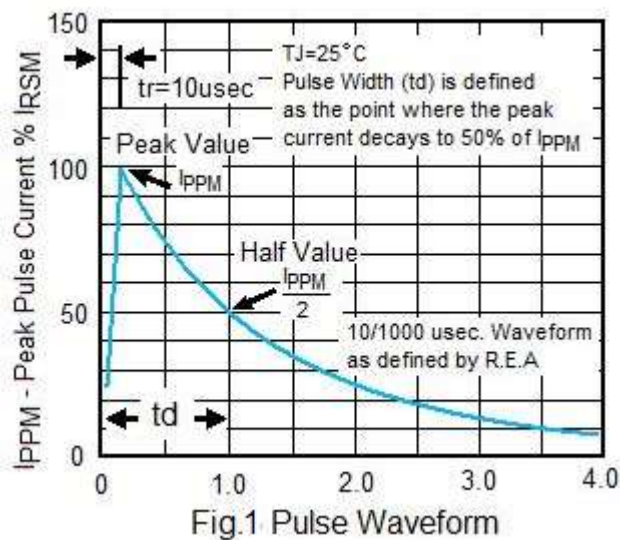

Marking Code

Part Number	Marking Code
SM8S Series	See Page.2




LEC = Longmacro Logo

xxx = Marking code (see Page.2)

Suggested P.C.B. PAD Layout

SIZE	DO-218AB	
	(mm)	(inch)
A	3.50	0.138
B	10.00	0.394
C	2.00	0.079
D	2.70	0.106
E	9.00	0.354
F	14.50	0.571







Note: 1. The pad layout is for reference purpose only.

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
DO-218AB	750	13

Reel Taping Specification

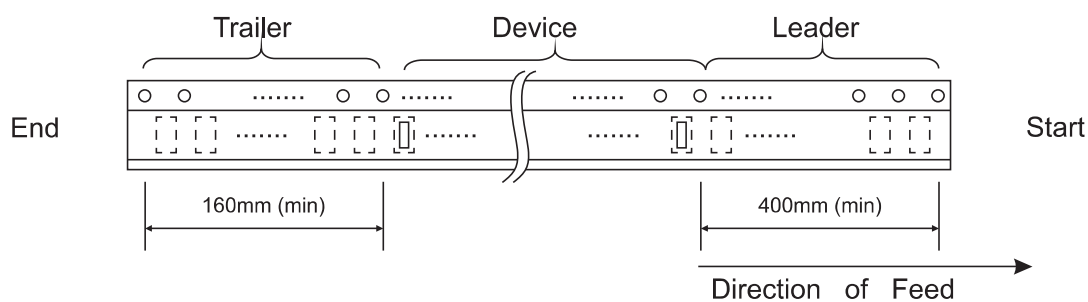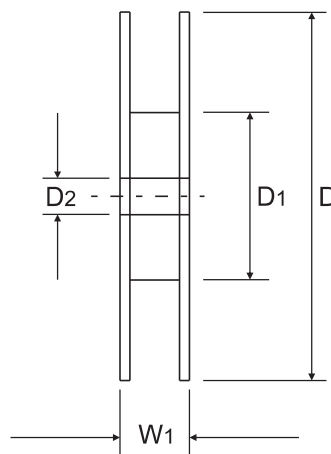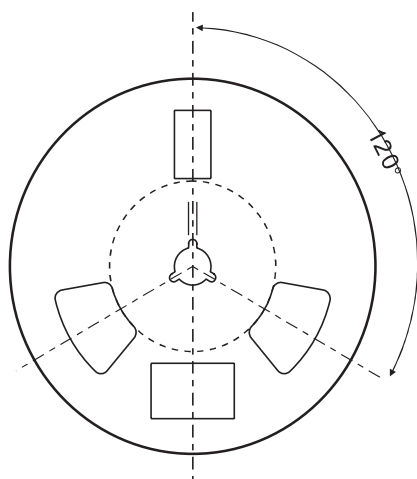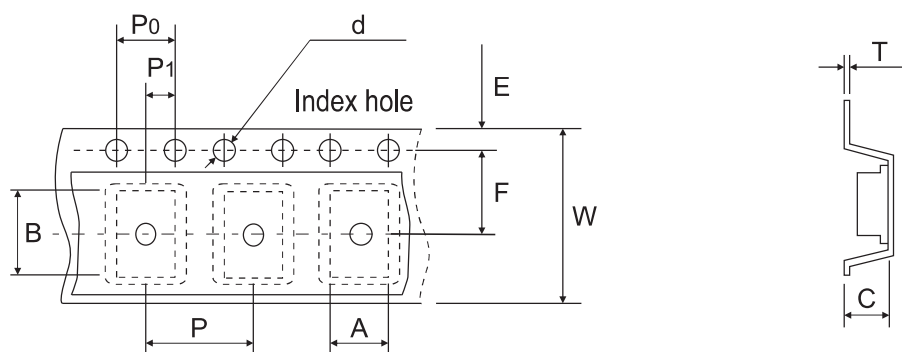

	SYMBOL	A	B	C	d	D	D1	D2
DO-218AB	(mm)	10.77 ± 0.20	16.33 ± 0.20	6.02 ± 0.20	1.50 ± 0.10	330 ± 2.00	60.00 ± 1.00	13.00 ± 0.20
	(inch)	0.424 ± 0.008	0.643 ± 0.008	0.237 ± 0.008	0.060 ± 0.004	12.992 ± 0.079	2.362 ± 0.039	0.512 ± 0.008

	SYMBOL	E	F	P	P0	P1	T	W	W1
DO-218AB	(mm)	1.75 ± 0.10	11.50 ± 0.10	16.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	12.00 ± 0.1	24.00 ± 0.30	30.40 + 2.00 - 1.00
	(inch)	0.069 ± 0.004	0.453 ± 0.004	0.630 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.472 ± 0.004	0.945 ± 0.012	1.197 + 0.079 - 0.039