

FEATURES

- The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- Built-in strain relief, ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 seconds at terminals



MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic body

Terminals: leads solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.003 ounce, 0.093 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.


	SYMBOLS	SS32L	SS33L	SS34L	SS35L	SS36L	SS38L	SS310L	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	V
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	V
Maximum average forward rectified current at T _L (see fig.1)	I _{AV}	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	70.0							A
Maximum instantaneous forward voltage at 3.0A	V _F	0.45			0.50		0.70		V
Maximum DC reverse current T _A =25°C	I _R	0.5					0.2		mA
at rated DC blocking voltage T _A =100°C		20					10		
Typical junction capacitance (NOTE 1)	C _J	500			300				pF
Typical thermal resistance (NOTE 2)	R _{θJA}	68.0							°C/W
Operating junction temperature range	T _J	-55 to +125					-55 to +150		°C
Storage temperature range	T _{STG}	-55 to +150							°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.






2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SS32L THRU SS310L


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

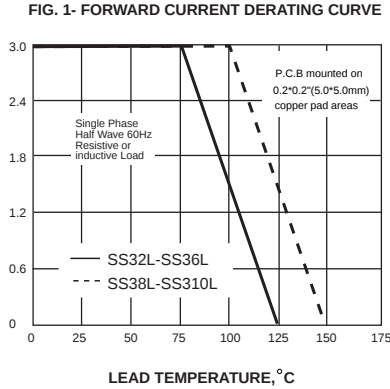

PEAK FORWARD SURGE CURRENT,
AMPERES

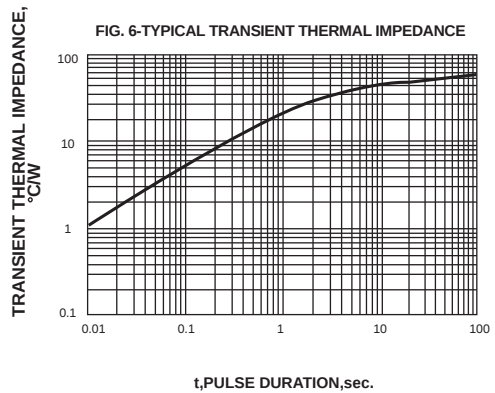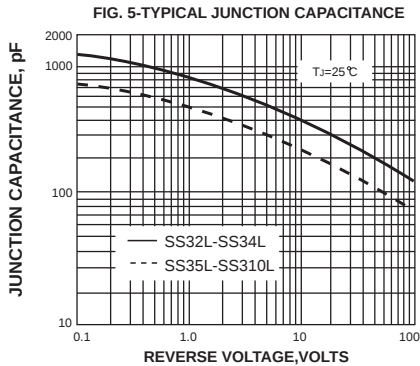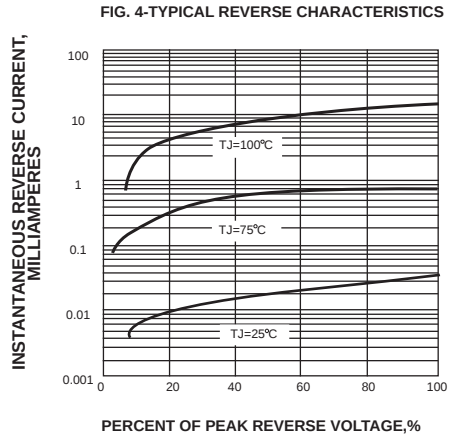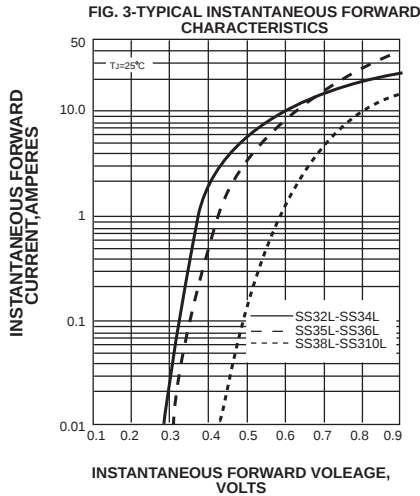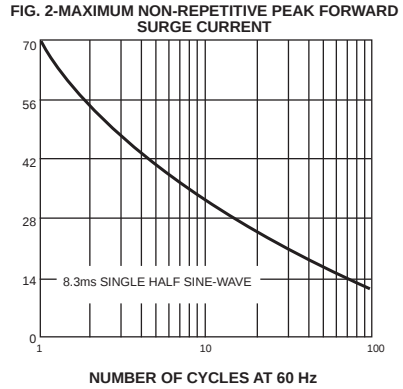

SMB Package Outline Dimensions

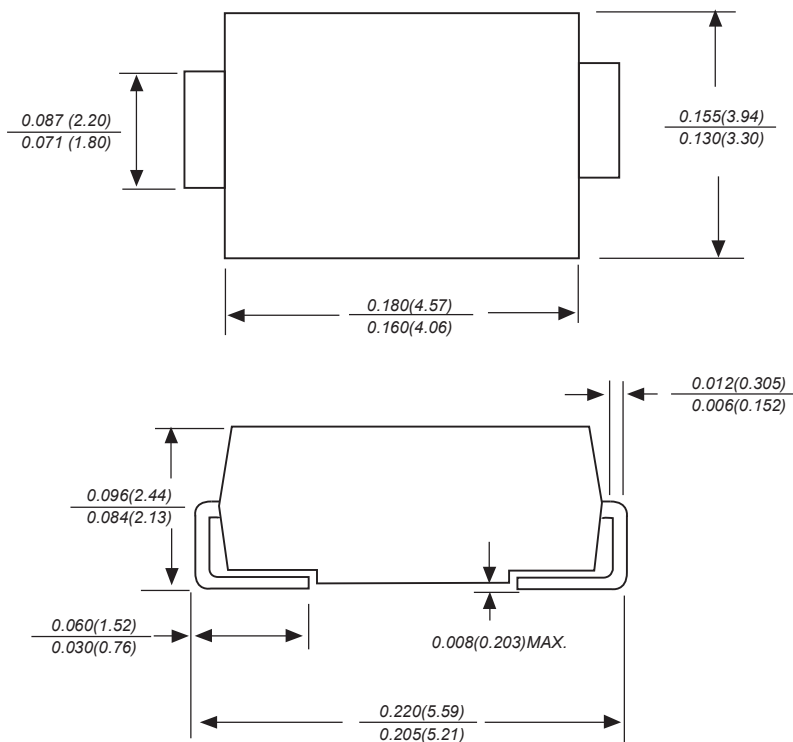

Dimensions in inches and (millimeters)

Ordering Information

MGF.P/N	PACKAGE	REEL	DESCRIPTION
SS32L THRU SS310L	SMB	3,000pcs	11 inch reel pack